
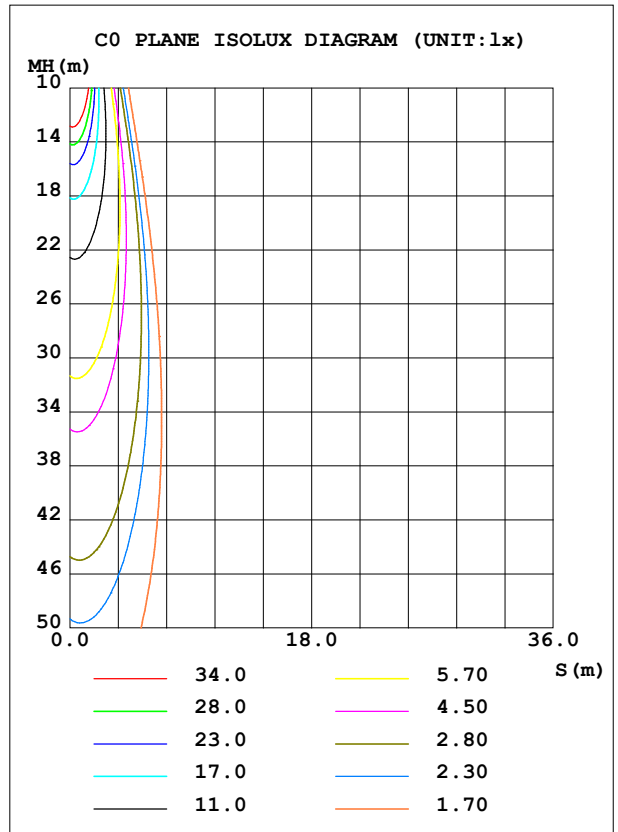


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.00 lm/W
MODEL	342AR	I _{max} (cd)	5541	S/MH (C0/180)	0.32	
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.34	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	856.85	η UP, DN (C0-180)	0.0,49.5	
NOMINAL FLUX (lm)	856.849	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,50.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	219.5	η down (%)	100.0	CIBSE SHR MAX	0.30	

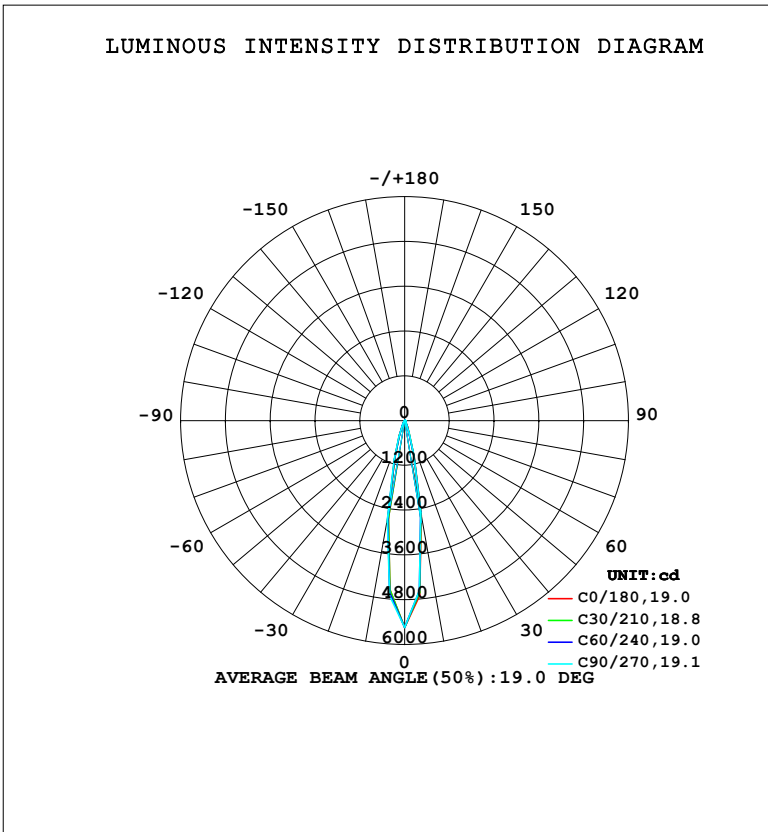

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2592	2558	2493	2630	2546	2545	2689	2643	0- 10	379.4	379.4	44.3,44.3
20	372.9	424.3	358.8	440.9	428.7	361.3	461.8	412.7	10- 20	333.8	713.3	83.2,83.2
30	90.37	96.79	88.03	88.08	81.20	84.79	91.37	102.2	20- 30	92.75	806.0	94.1,94.1
40	32.06	35.07	30.98	31.24	28.24	31.79	33.70	35.85	30- 40	35.64	841.7	98.2,98.2
50	5.773	6.741	4.995	5.658	5.056	6.102	6.231	6.423	40- 50	13.24	854.9	99.8,99.8
60	0.0616	0	0.0545	0	0.0475	0.1095	0.0301	0.0863	50- 60	1.937	856.8	100,100
70	0.0000	0	0	0	0	0.0240	0	0.0182	60- 70	0.0189	856.8	100,100
80	0	0	0	0	0	0	0	0	70- 80	0.0018	856.8	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0000	856.8	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 850.52 lm

%lum = 99.3%

%lamp = 99.3%

Conical surface Flux(130deg): 856.84 lm

%lum = 100.0%


%lamp = 100.0%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

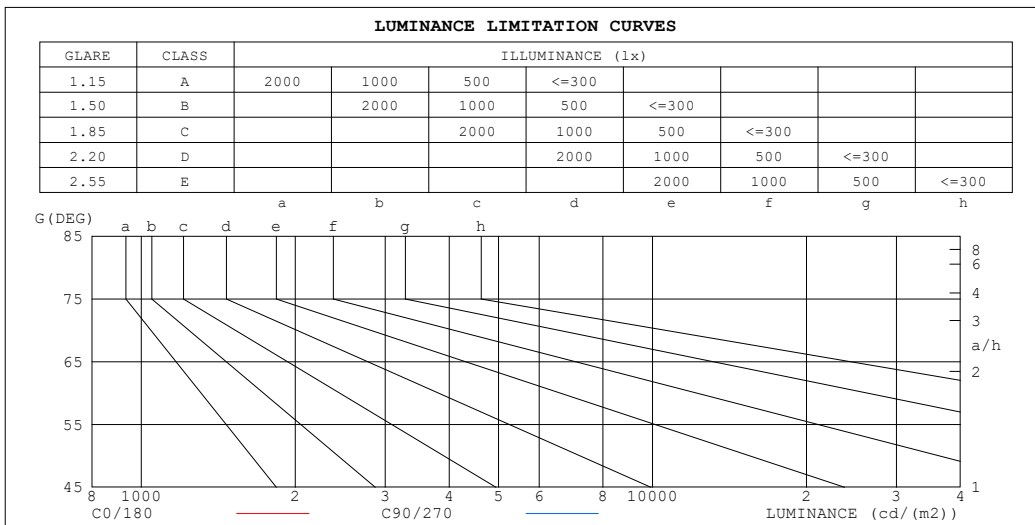

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	1	0
60	1	1
55	26	17
50	91	78
45	227	200


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.10	1.11	1.09	1.08	1.07	1.06	1.05	1.03	1.03	1.02	1.00	.99	.99	.97
2.0	1.08	1.05	1.03	1.07	1.04	1.02	1.04	1.01	.99	1.01	.99	.98	.98	.97	.96	.94
3.0	1.04	1.01	.98	1.03	.99	.97	1.00	.98	.96	.98	.96	.94	.96	.94	.93	.92
4.0	1.00	.97	.94	.99	.96	.93	.97	.94	.92	.95	.93	.91	.94	.92	.90	.89
5.0	.97	.93	.90	.96	.93	.90	.95	.91	.89	.93	.90	.88	.92	.89	.88	.87
6.0	.94	.90	.87	.93	.90	.87	.92	.89	.86	.91	.88	.86	.90	.87	.85	.84
7.0	.91	.87	.85	.91	.87	.84	.90	.86	.84	.89	.86	.84	.88	.85	.83	.82
8.0	.89	.85	.82	.88	.85	.82	.87	.84	.82	.87	.84	.82	.86	.83	.81	.80
9.0	.87	.83	.80	.86	.83	.80	.85	.82	.80	.85	.82	.80	.84	.81	.79	.79
10.0	.85	.81	.78	.84	.81	.78	.84	.80	.78	.83	.80	.78	.82	.80	.78	.77

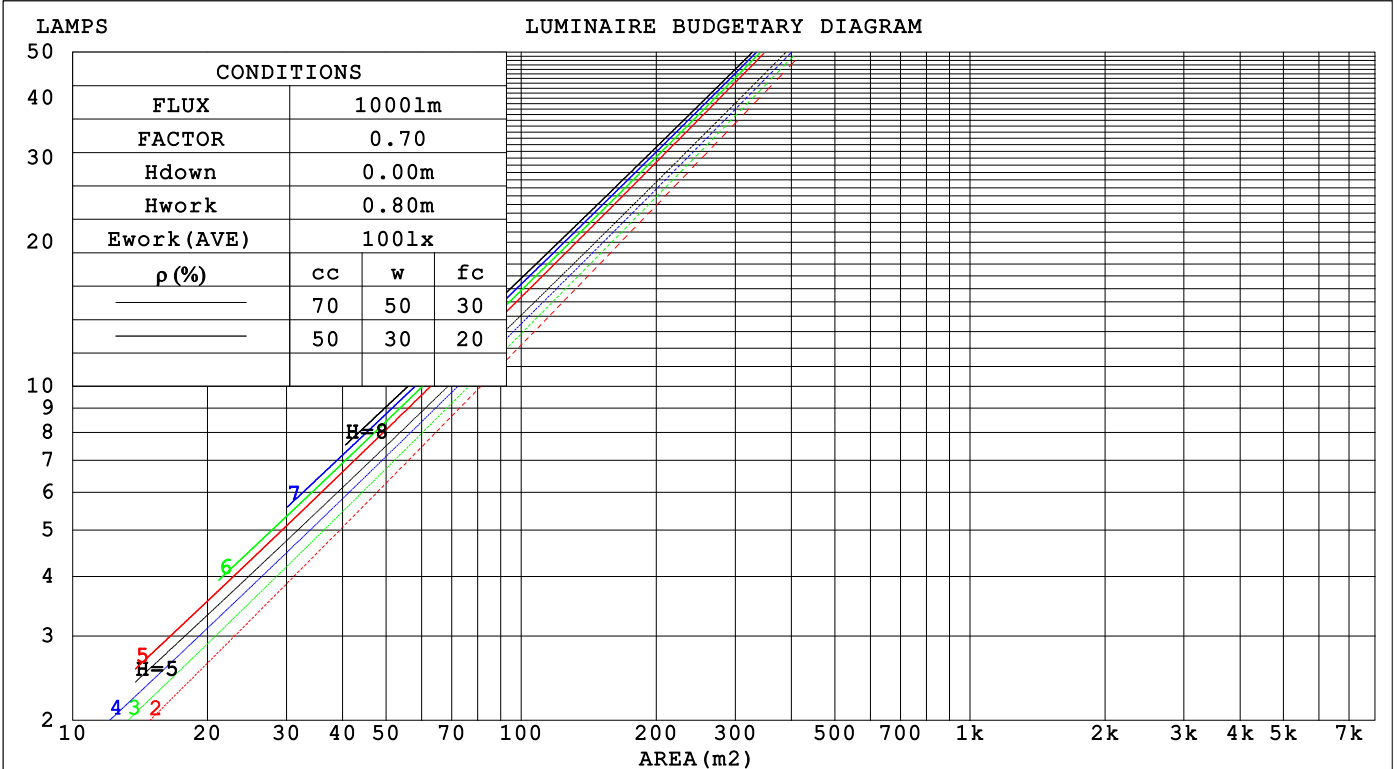

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz																	
Lamp Flux:856.849x1 lm																	
NAME:						TYPE:						WEIGHT:					
SPEC.:						DIM.:						SERIAL No.:					
MFR.: EVERFINE						SUR.:						Shielding Angle:					

ρ_{CC}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.131	.074	.024	.124	.071	.022	.112	.064	.020	.100	.058	.019	.090	.052	.017		
2.0	.121	.066	.020	.115	.064	.020	.105	.058	.018	.096	.054	.017	.087	.049	.016		
3.0	.112	.060	.018	.108	.058	.017	.099	.054	.016	.091	.050	.015	.084	.047	.014		
4.0	.105	.054	.016	.101	.053	.016	.094	.050	.015	.087	.047	.014	.081	.044	.013		
5.0	.098	.050	.015	.095	.049	.014	.089	.046	.014	.084	.044	.013	.078	.042	.013		
6.0	.093	.047	.013	.090	.046	.013	.085	.044	.013	.080	.042	.012	.076	.040	.012		
7.0	.088	.043	.012	.086	.043	.012	.081	.041	.012	.077	.039	.011	.073	.038	.011		
8.0	.084	.041	.011	.082	.040	.011	.078	.039	.011	.074	.037	.011	.071	.036	.011		
9.0	.080	.039	.011	.078	.038	.011	.074	.037	.010	.071	.036	.010	.068	.035	.010		
10.0	.076	.037	.010	.075	.036	.010	.072	.035	.010	.069	.034	.010	.066	.033	.010		

ρ_{CC}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.168	.158	.149	.144	.135	.128	.098	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.149	.133	.119	.128	.114	.103	.088	.079	.072	.051	.046	.042	.016	.015	.014		
3.0	.134	.113	.097	.115	.098	.084	.079	.068	.059	.046	.040	.035	.015	.013	.011		
4.0	.121	.098	.080	.104	.084	.069	.072	.059	.049	.041	.034	.029	.013	.011	.009		
5.0	.110	.085	.067	.095	.074	.058	.065	.052	.041	.038	.030	.024	.012	.010	.008		
6.0	.101	.075	.057	.087	.065	.049	.060	.046	.035	.035	.027	.021	.011	.009	.007		
7.0	.094	.067	.048	.080	.058	.042	.056	.041	.030	.032	.024	.018	.010	.008	.006		
8.0	.087	.060	.042	.075	.052	.036	.052	.037	.026	.030	.022	.015	.010	.007	.005		
9.0	.081	.054	.036	.070	.047	.032	.048	.033	.022	.028	.020	.013	.009	.006	.004		
10.0	.076	.050	.032	.066	.043	.028	.045	.030	.020	.027	.018	.012	.009	.006	.004		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz										
Lamp Flux:856.849x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-2.6	-2.0	-2.4	-1.8	-1.7	-3.0	-2.4	-2.8	-2.3	-2.1
3H	-2.7	-2.2	-2.5	-2.0	-1.8	-3.2	-2.6	-2.9	-2.4	-2.2
4H	-2.8	-2.3	-2.6	-2.1	-1.9	-3.3	-2.7	-3.0	-2.5	-2.3
6H	-2.9	-2.4	-2.6	-2.2	-1.9	-3.3	-2.8	-3.1	-2.6	-2.4
8H	-2.9	-2.5	-2.7	-2.2	-2.0	-3.4	-2.9	-3.1	-2.6	-2.4
12H	-3.0	-2.5	-2.7	-2.3	-2.0	-3.4	-3.0	-3.1	-2.7	-2.4
4H 2H	-2.8	-2.3	-2.6	-2.1	-1.9	-3.3	-2.7	-3.0	-2.5	-2.3
3H	-3.0	-2.5	-2.7	-2.3	-2.0	-3.4	-2.9	-3.1	-2.7	-2.4
4H	-3.1	-2.6	-2.8	-2.4	-2.1	-3.5	-3.1	-3.2	-2.8	-2.5
6H	-3.2	-2.8	-2.8	-2.5	-2.1	-3.6	-3.2	-3.3	-2.9	-2.6
8H	-3.2	-2.9	-2.9	-2.5	-2.2	-3.7	-3.3	-3.3	-3.0	-2.6
12H	-3.3	-3.0	-2.9	-2.6	-2.2	-3.7	-3.4	-3.3	-3.0	-2.7
8H 4H	-3.2	-2.9	-2.9	-2.5	-2.2	-3.7	-3.3	-3.3	-3.0	-2.6
6H	-3.4	-3.1	-2.9	-2.7	-2.3	-3.8	-3.5	-3.4	-3.1	-2.7
8H	-3.4	-3.2	-3.0	-2.7	-2.3	-3.9	-3.6	-3.4	-3.2	-2.7
12H	-3.5	-3.3	-3.0	-2.8	-2.3	-3.9	-3.7	-3.5	-3.3	-2.8
12H 4H	-3.3	-3.0	-2.9	-2.6	-2.2	-3.7	-3.4	-3.3	-3.0	-2.7
6H	-3.4	-3.2	-3.0	-2.7	-2.3	-3.9	-3.6	-3.4	-3.2	-2.7
8H	-3.5	-3.3	-3.0	-2.8	-2.3	-3.9	-3.7	-3.5	-3.3	-2.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / -42.8					+ 2.7 / -44.1				
1.5H	+ 4.7 / -30.9					+ 4.9 / -32.4				
2.0H	+ 8.5 / -57.2					+ 8.6 / -48.6				

CIE Pub.117, 856.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	107	104	102	97
3.00	113	109	107	111	108	106	108	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

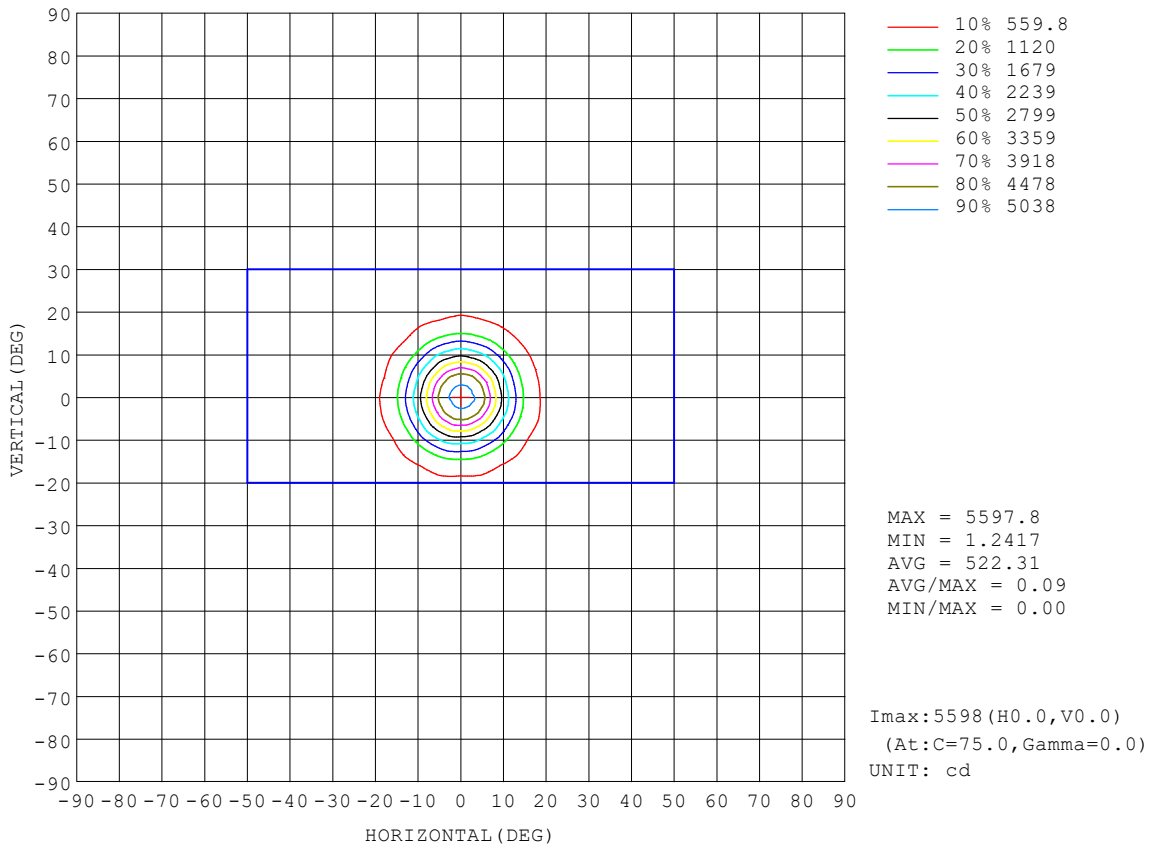


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

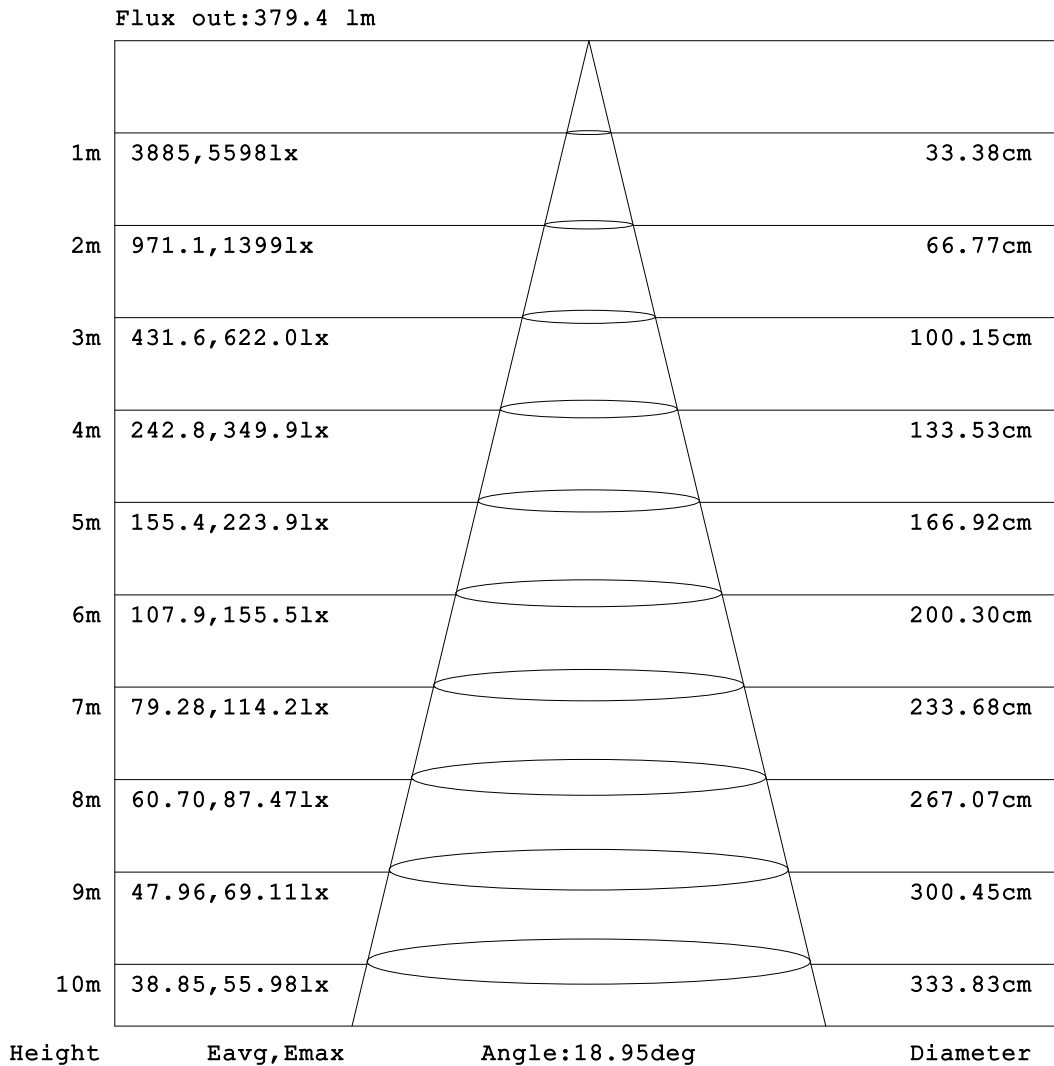


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

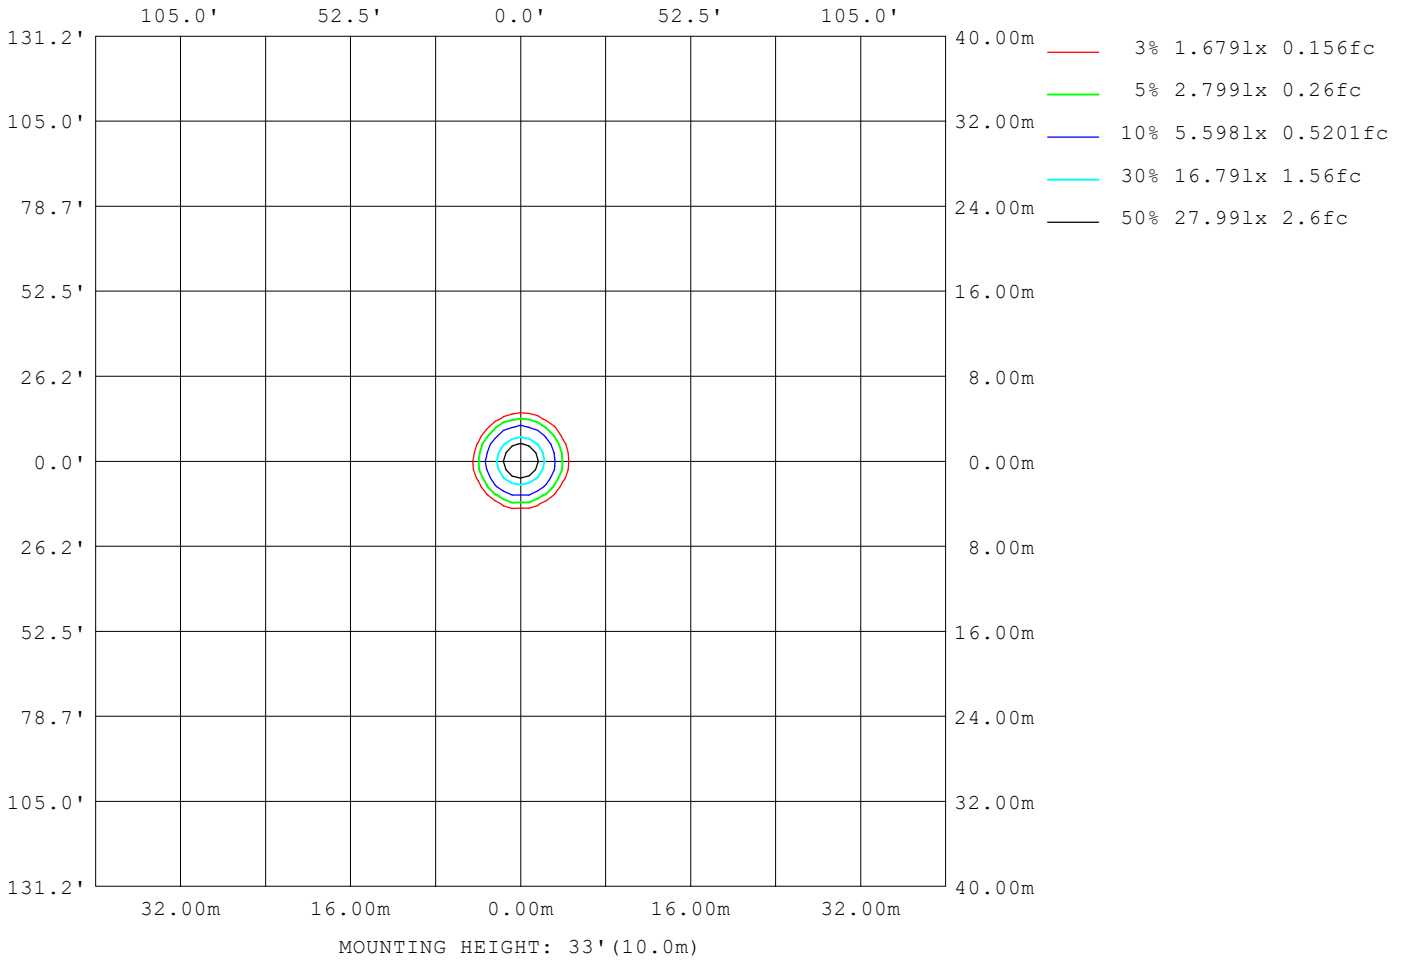

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2024-01-22

γ Range: 0 - 90DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	0
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	0
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	0
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

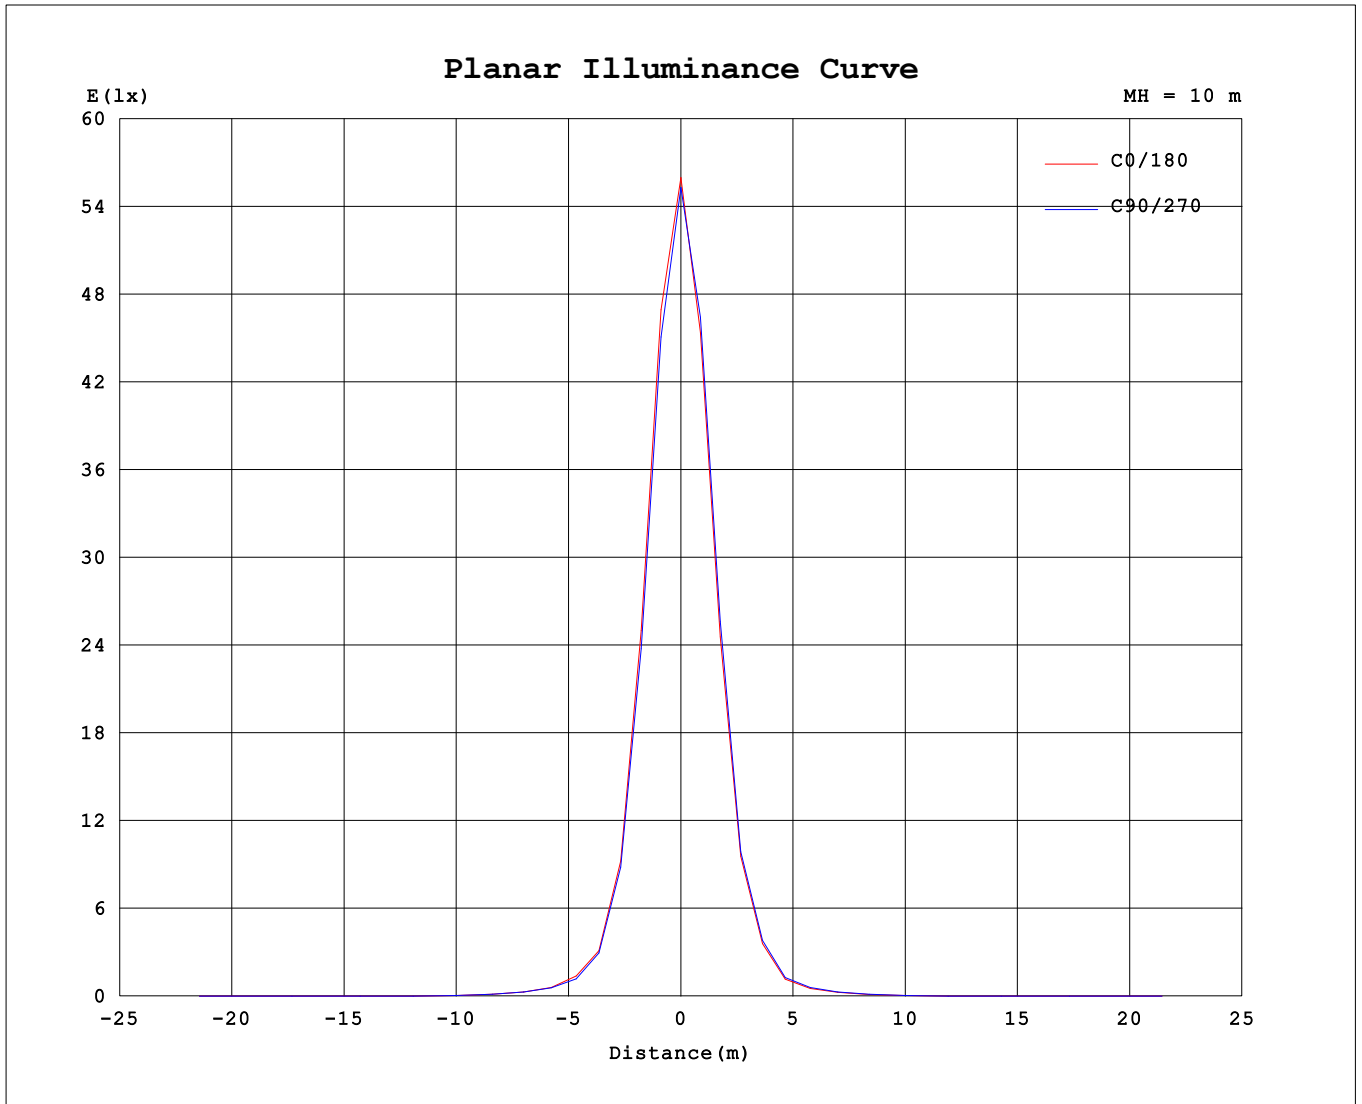

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.41V I:0.0864A P:10.201W PF:0.5356 Freq:50.00Hz Lamp Flux:856.849x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541	5541
5	4701	4712	4625	4642	4579	4611	4568	4602	4555	4579	4534	4572	4545	4504	4550	4540	4624	4632	4707
10	2592	2610	2523	2558	2474	2523	2493	2601	2586	2630	2552	2575	2546	2490	2542	2545	2650	2623	2689
15	1015	1020	988	1008	990	1008	982	1041	1042	1058	1024	1047	1053	1019	1037	1028	1082	1071	1100
20	373	431	358	424	351	422	359	435	372	441	364	433	429	355	419	361	449	382	462
25	184	169	168	171	163	162	161	165	164	165	159	159	155	151	154	156	164	166	173
30	90.4	93.6	96.1	96.8	90.0	88.7	88.0	88.6	88.2	88.1	84.9	83.3	81.2	80.0	83.3	84.8	87.8	88.3	91.4
35	54.2	56.2	58.3	58.5	54.7	53.8	54.0	52.9	52.0	52.5	51.5	50.5	48.1	48.3	51.3	52.3	53.7	53.8	55.1
40	32.1	33.2	34.6	35.1	32.4	31.5	31.0	30.3	30.6	31.2	30.2	28.9	28.2	28.9	31.2	31.8	31.9	32.2	33.7
45	15.9	16.4	17.3	17.6	16.2	14.6	14.2	13.7	14.7	15.3	14.9	14.1	14.0	14.6	16.1	16.3	16.1	15.9	16.8
50	5.77	6.08	6.67	6.74	5.80	5.30	4.99	4.89	4.95	5.66	5.50	5.10	5.06	5.48	6.19	6.10	5.89	5.91	6.23
55	1.49	1.72	1.90	1.84	1.42	1.24	1.00	1.01	1.14	1.47	1.44	1.30	1.29	1.48	1.69	1.67	1.50	1.52	1.62
60	0.06	0.00	0.06	0.00	0.05	0.00	0.05	0.00	0.06	0.00	0.06	0.00	0.05	0.09	0.08	0.11	0.01	0.08	0.03
65	0.02	0.00	0.01	0.00	0.02	0.00	0.02	0.00	0.01	0.00	0.02	0.00	0.00	0.02	0.00	0.04	0.00	0.05	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.04	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

